



Model: C2230K

Basic size of
mm

d_1 :	135
D:	270
B:	73

The basic rated load is
kN

trends C:	980
static state C_0 :	1220
Fatigue load limit P_u :	116

Rated rotation speed is
r/min

Refer to the speed:	2400
limit speed:	3200
Mass bearing + tightening sleeve:	23

model



bearing:	*C2230 K
tapered adapter-sleeve:	H3130L

Dimensions are
mm

d_1 :	135
$d_2 \sim$:	177
d_3 :	180
D1 \sim :	236
B_1 :	111
B_2 :	26
$r_{1,2}$ the min:	3
$s_1^{1)}$ \sim :	11.2
$s_2^{1)}$ \sim :	-

Shoulder gear and chamfer size
mm

d_a the max:	200
d_b the min:	160

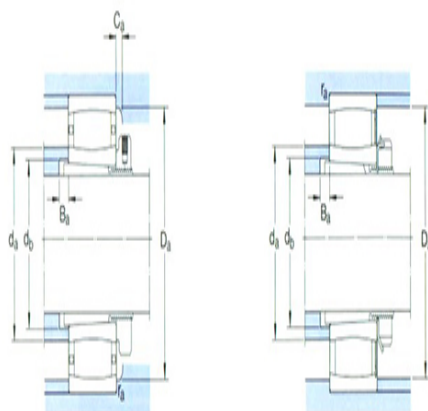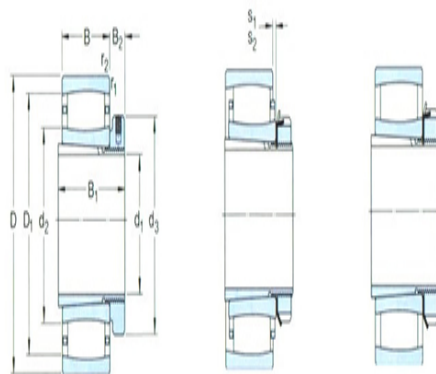

Da the min:	215
Da the max:	256
B _a the min:	15
Ca ²) the min:	2.5
r _a the max:	2.5

Calculation coefficient

k ₁ :	0.119
k ₂ :	0.096