



Model: H318E

Basic size of
mm

d_1 :	80
D:	160
B:	40

The basic rated load is
kN

trends C:	325
static state C_0 :	380
Fatigue load limit P_u :	42.5

Rated rotation speed is
r/min

Refer to the speed:	3800
limit speed:	5300
Mass bearing + tightening sleeve:	4.5

model



bearing:	*C2218 K
tapered adapter-sleeve:	H318E

Dimensions are
mm

d_1 :	80
$d_2 \sim$:	112
d_3 :	120
D1 ~:	144
B_1 :	65
B_2 :	19
$r_{1,2}$ the min:	2
$s_1^{1)}$ ~:	9.5
$s_2^{1)}$ ~:	-

Shoulder gear and chamfer size
mm

d_a the max:	120
d_b the min:	96

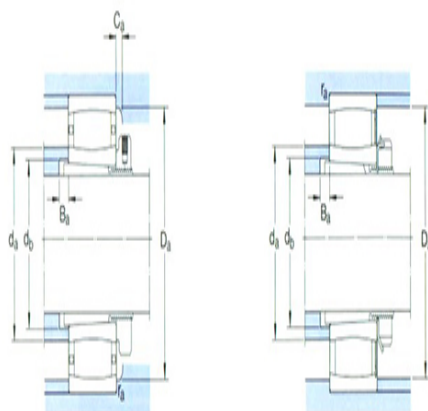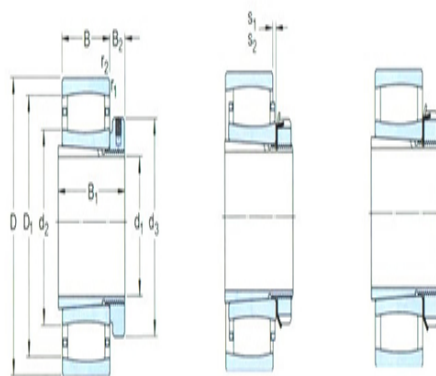

Da the min:	130
Da the max:	149
B _a the min:	10
Ca ²⁾ the min:	1.4
r _a the max:	2

Calculation coefficient

k ₁ :	0.104
k ₂ :	0.117