



Model: H2320

Basic size of
mm

d_1 :	90
D :	215
B :	73

The basic rated load is
kN

trends C :	800
static state C_0 :	880
Fatigue load limit P_u :	91.5

Rated rotation speed is
r/min

Refer to the speed :	2600
limit speed :	3600
Mass bearing + tightening sleeve :	14.5

model



bearing :	*C2320 K
tapered adapter-sleeve :	H2320

Dimensions are
mm

d_1 :	90
$d_2 \sim$:	126
d_3 :	130
D1 \sim :	185
B_1 :	97
B_2 :	20
$r_{1,2}$ the min :	3
$s_1^{1)}$ \sim :	11.2
$s_2^{1)}$ \sim :	-

Shoulder gear and chamfer size
mm

d_a the max :	150
d_b the min :	110

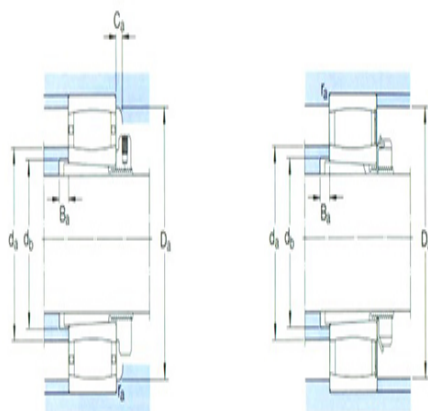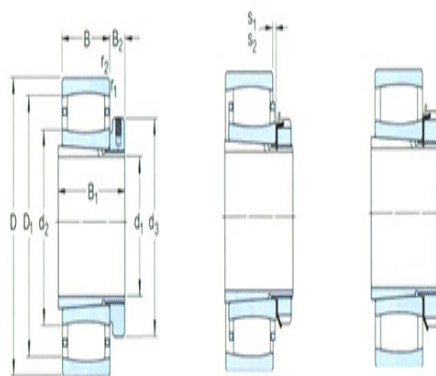

Da the min:	170
Da the max:	201
B _a the min:	7
Ca ²) the min:	3.2
r _a the max:	2.5

Calculation coefficient

k ₁ :	0.113
k ₂ :	0.096