



Model: C3064KM

Basic size of
mm

d ₁ :	300
D:	480
B:	121

The basic rated load is
kN

trends C:	2280
static state Co:	4000
Fatigue load limit Pu:	310

Rated rotation speed is
r/min

Refer to the speed:	1000
limit speed:	1400
Mass bearing + tightening sleeve:	95

model


bearing:	*C3064K M
tapered adapter- sleeve:	OH3064H

Dimensions are
mm

d ₁ :	300
d ₂ ~ :	376
d ₃ :	380
D1 ~ :	440
B ₁ :	171
B ₂ :	42
r _{1,2} the min:	55
s ₁ ¹⁾ ~ :	4
s ₂ ¹⁾ ~ :	23.3

Shoulder gear and chamfer size
mm

d _a the max:	395
-------------------------	-----

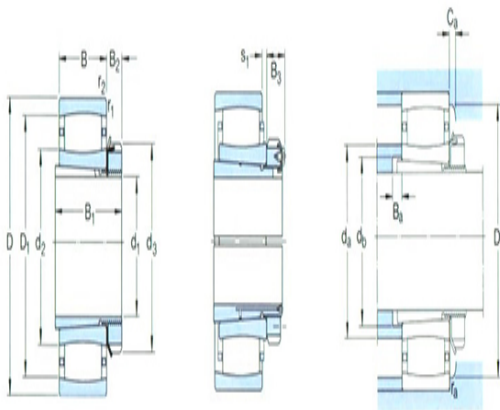

d_b the min:	334
Da the min:	430
Da the max:	465
B_a the min:	13
Ca^2) the min:	1.8
r_a the max:	3

Calculation coefficient

k_1 :	0.121
k_2 :	0.098