



Model: OH3056H

Basic size of
mm

d ₁ :	260
D :	420
B :	106

The basic rated load is
kN


trends C :	1860
static state Co :	3100
Fatigue load limit Pu :	250

Rated rotation speed is
r/min

Refer to the speed :	1200
limit speed :	1600
Mass bearing + tightening sleeve :	65

model

bearing :	*C3056K
tapered adapter-sleeve :	OH3056 H

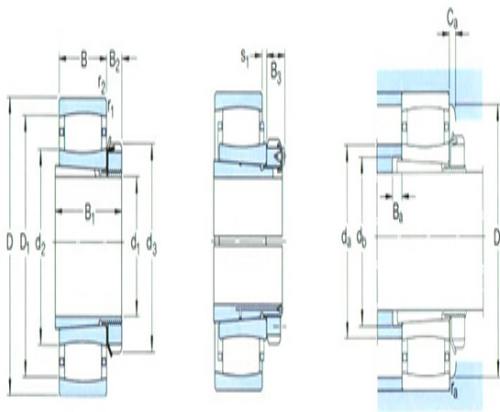

Dimensions are
mm

d ₁ :	260
d ₂ ~ :	328
d ₃ :	330
D1 ~ :	389
B ₁ :	152
B ₂ :	38
r _{1,2} the min :	50
s ₁ ¹⁾ ~ :	4
s ₂ ¹⁾ ~ :	21.3

Shoulder gear and chamfer size
mm

d _a the max :	350
d _b the min :	292

Da the min:	375
Da the max:	405
B _a the min:	12
Ca ²) the min:	1.8
r _a the max:	3

Calculation coefficient

k ₁ :	0.121
k ₂ :	0.098