



Model: OH30/750HE

Basic size of
mm

d ₁ :	710
D :	1090
B :	250

The basic rated load is
kN

trends C :	9000
static state Co :	18000
Fatigue load limit Pu :	1100

Rated rotation speed is
r/min

Refer to the speed :	380
limit speed :	530
Mass bearing + tightening sleeve :	1000


model

bearing :	*C30/750KMB 1)
tapered adapter- sleeve :	OH30/750HE

Dimensions are
mm

d ₁ :	710
d ₂ ~ :	858
d ₃ :	870
D1 ~ :	993
B ₁ :	356
B ₂ :	90
r _{1,2} the min :	112
s ₁ ¹⁾ ~ :	7.5
s ₂ ¹⁾ ~ :	25

Shoulder gear and chamfer size
mm

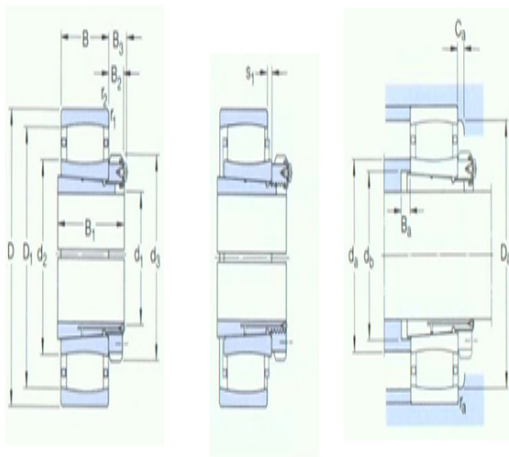

d_a the max:	855
d_b the min:	778
D_a the min:	995
D_a the max:	1062
B_a the min:	26
$Ca^{2)}$ the min:	21.8
r_a the max:	6

Calculation coefficient

k_1 :	-
k_2 :	0.112