



## Model: C2220K

Basic size of  
mm

d <sub>1</sub> :	95
D:	180
B:	46

The basic rated load is  
kN

trends C:	415
static state Co:	465
Fatigue load limit	47.5
Pu:	

Rated rotation speed is  
r/min

Refer to the speed:	3600
limit speed:	4800
Mass bearing + return sleeve:	5.3


### model

bearing:	*C2220
	K
withdrawal sleeve:	AHX320

Dimensions are  
mm

d <sub>1</sub> :	95
d <sub>2</sub> ~ :	118
D1 ~ :	157
B <sub>1</sub> :	59
B <sub>2</sub> <sup>1)</sup> ~ :	63
G:	M110×2
G <sub>1</sub> :	10
r <sub>1,2</sub> the min:	2.1
s <sub>1</sub> <sup>1)</sup> ~ :	10.1
s <sub>2</sub> <sup>1)</sup> ~ :	-

Shoulder gear and chamfer size  
mm

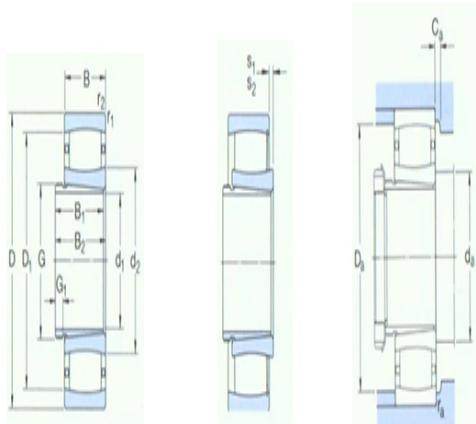

d <sub>a</sub> the min:	112
d <sub>a</sub> the max:	130
D <sub>a</sub> the min:	150
D <sub>a</sub> the max:	168
C <sub>a</sub> <sup>3)</sup> the min:	0.9
r <sub>a</sub> the max:	2

Calculation coefficient

k <sub>1</sub> :	0.108
k <sub>2</sub> :	0.11