



### Model: C2320K

Basic size of  
mm

d <sub>1</sub> :	95
D :	215
B :	73

The basic rated load is  
kN

trends C :	800
static state Co :	880
Fatigue load limit Pu :	91.5

Rated rotation speed is  
r/min

Refer to the speed :	2600
limit speed :	3600
Mass bearing + return sleeve :	13.5

model


bearing :	*C2320K
withdrawal sleeve :	AHX232 0

Dimensions are  
mm

d <sub>1</sub> :	95
d <sub>2</sub> ~ :	126
D1 ~ :	185
B <sub>1</sub> :	90
B <sub>2</sub> <sup>1)</sup> ~ :	94
G :	M110×2
G <sub>1</sub> :	16
r <sub>1,2</sub> the min :	3
s <sub>1</sub> <sup>1)</sup> ~ :	11.2
s <sub>2</sub> <sup>1)</sup> ~ :	-

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min :	114
--------------------------	-----

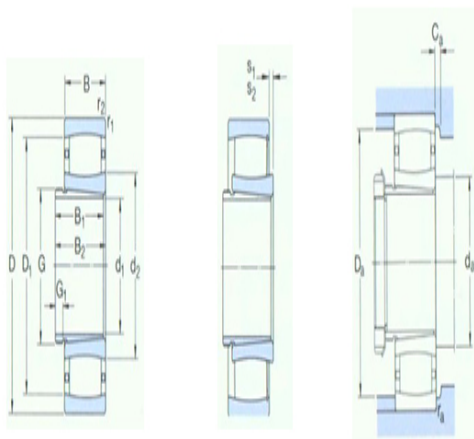

$d_a$ the max:	150
Da the min:	170
Da the max:	201
Ca <sup>3</sup> ) the min:	3.2
$r_a$ the max:	2.5

Calculation coefficient

$k_1$ :	0.113
$k_2$ :	0.096