



Model: C4026K30

Basic size of
mm

d ₁ :	125
D :	200
B :	69

The basic rated load is
kN

trends C :	620
static state Co :	930
Fatigue load limit Pu :	91.5

Rated rotation speed is
r/min

Refer to the speed :	1900
limit speed :	2800
Mass bearing + return sleeve :	8.7

model


bearing :	*C4026K3 0
withdrawal sleeve :	AH24026

Dimensions are
mm

d ₁ :	125
d ₂ ~ :	149
D1 ~ :	181
B ₁ :	83
B ₂ ¹⁾ ~ :	93
G :	M140×2
G ₁ :	14
r _{1,2} the min :	2
s ₁ ¹⁾ ~ :	11.4
s ₂ ¹⁾ ~ :	-

Shoulder gear and chamfer size
mm

d _a the min :	139
--------------------------	-----

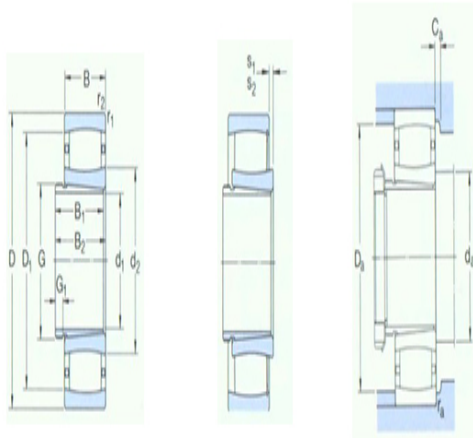

d_a the max:	155
----------------	-----

Da the min:	175
-------------	-----

Da the max:	191
-------------	-----

Ca ³⁾ the min:	1.9
---------------------------	-----

r_a the max:	2
----------------	---

Calculation coefficient

k_1 :	0.113
---------	-------

k_2 :	0.097
---------	-------