



Model: C4030K30V

Basic size of
 mm

d ₁ :	145
D :	225
B :	75

The basic rated load is
 kN

trends C :	780
static state Co :	1320
Fatigue load limit Pu :	125

Rated rotation speed is
 r/min

Refer to the speed :	-
limit speed :	750
Mass bearing + return sleeve :	11.5

model


bearing :	*C4030K30 V
withdrawal sleeve :	AH24030

Dimensions are
 mm

d ₁ :	145
d ₂ ~ :	173
D1 ~ :	204
B ₁ :	90
B ₂ ¹⁾ ~ :	101
G :	M155×3
G ₁ :	15
r _{1,2} the min :	2.1
s ₁ ¹⁾ ~ :	17.4
s ₂ ¹⁾ ~ :	10.6

Shoulder gear and chamfer size
 mm

d _a the min :	161
--------------------------	-----

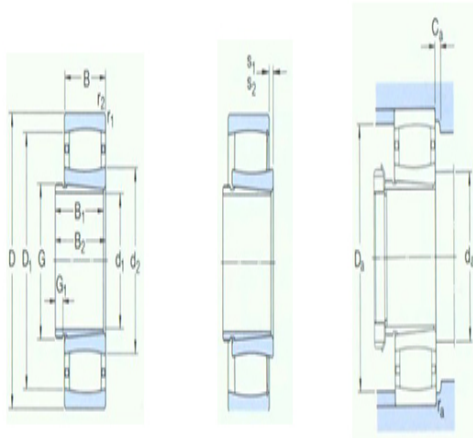

d_a the max:	185
Da the min:	-
Da the max:	214
Ca ³⁾ the min:	-
r_a the max:	2

Calculation coefficient

k_1 :	0.107
k_2 :	0.106