



Model: AH24128

Basic size of
mm

d ₁ :	135
D :	225
B :	85

The basic rated load is
kN

trends C :	1000
static state Co :	1600
Fatigue load limit Pu :	153

Rated rotation speed is
r/min

Refer to the speed :	-
limit speed :	630
Mass bearing + return sleeve :	15.5

model


bearing :	*C4128K30 V
withdrawal sleeve :	AH24128

Dimensions are
mm

d ₁ :	135
d ₂ ~ :	167
D1 ~ :	203
B ₁ :	99
B ₂ ¹⁾ ~ :	109
G :	M150×2
G ₁ :	14
r _{1,2} the min :	2.1
s ₁ ¹⁾ ~ :	12
s ₂ ¹⁾ ~ :	5.2

Shoulder gear and chamfer size
mm

d _a the min :	151
--------------------------	-----

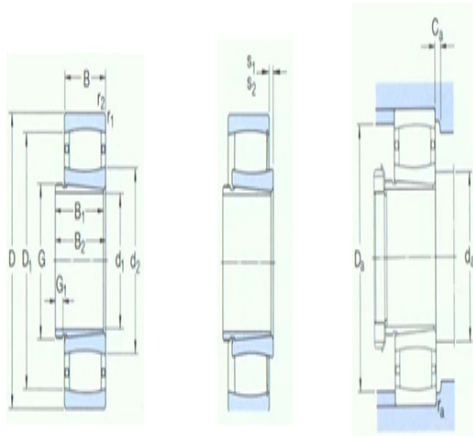

d_a the max:	185
----------------	-----

Da the min:	-
-------------	---

Da the max:	214
-------------	-----

Ca ³⁾ the min:	-
---------------------------	---

r_a the max:	2
----------------	---

Calculation coefficient

k_1 :	0.111
---------	-------

k_2 :	0.097
---------	-------