



Model: C4060K30M

Basic size of
 mm

d ₁ :	280
D:	460
B:	160

The basic rated load is
 kN

trends C:	2900
static state Co:	4900
Fatigue load limit Pu:	380

Rated rotation speed is
 r/min

Refer to the speed:	850
limit speed:	1200
Mass bearing + return sleeve:	110

model


bearing:	*C4060K30 M
withdrawal sleeve:	AOH24060 G

Dimensions are
 mm

d ₁ :	280
d ₂ ~ :	338
D1 ~ :	409
B ₁ :	184
B ₂ ¹⁾ ~ :	202
G:	Tr320×5
G ₁ :	24
r _{1,2} the min:	4
s ₁ ²⁾ ~ :	30.4

Shoulder gear and chamfer size
 mm

d _a the min:	315
-------------------------	-----

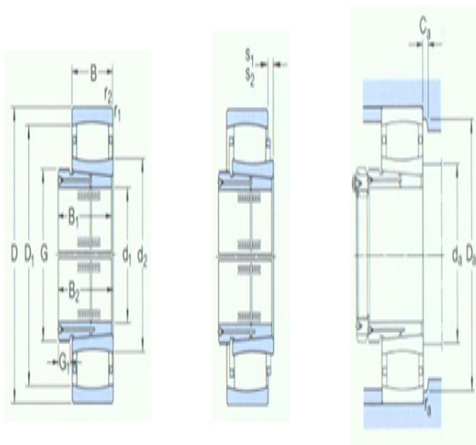

d_a the max: 360

Da the min: 400

Da the max: 445

Ca³) the min: 2.8

r_a the max: 3

Calculation coefficient

k_1 : 0.105

k_2 : 0.106