



## Model: AOHX3192G

Basic size of  
mm

d <sub>1</sub> :	440
D:	760
B:	240

The basic rated load is  
kN

trends C:	6800
static state Co:	12000
Fatigue load limit Pu:	800

Rated rotation speed is  
r/min

Refer to the speed:	600
limit speed:	800
Mass bearing + return sleeve:	480

### model


bearing:	*C3192KM
withdrawal sleeve:	AOHX3192 G

Dimensions are  
mm

d <sub>1</sub> :	440
d <sub>2</sub> ~ :	559
D1 ~ :	679
B <sub>1</sub> :	285
B <sub>2</sub> <sup>1)</sup> ~ :	296
G:	Tr480×6
G <sub>1</sub> :	43
r <sub>1,2</sub> the min:	7.5
s <sub>1</sub> <sup>2)</sup> ~ :	51

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	492
d <sub>a</sub> the max:	570

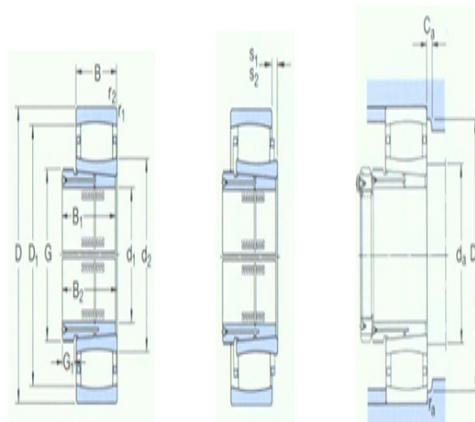

Da the min:	655
Da the max:	728
Ca <sup>3)</sup> the min:	4.2
r <sub>a</sub> the max:	6

#### Calculation coefficient

k <sub>1</sub> :	0.108
k <sub>2</sub> :	0.105