



Model: C30/800KMB1

Basic size of
mm

d ₁ :	750
D:	1150
B:	258

The basic rated load is
kN

trends C:	9150
static state Co:	18600
Fatigue load limit Pu:	1120

Rated rotation speed is
r/min

Refer to the speed:	360
limit speed:	480
Mass bearing + return sleeve:	1060

model


bearing:	*C30/800KMB 1)
withdrawal sleeve:	AOH30/800

Dimensions are
mm

d ₁ :	750
d ₂ ~ :	913
D1 ~ :	1047
B ₁ :	308
B ₂ ¹⁾ ~ :	326
G:	Tr850×7
G ₁ :	50
r _{1,2} the min:	7.5
s ₁ ²⁾ ~ :	25

Shoulder gear and chamfer size
mm

d _a the min:	828
-------------------------	-----

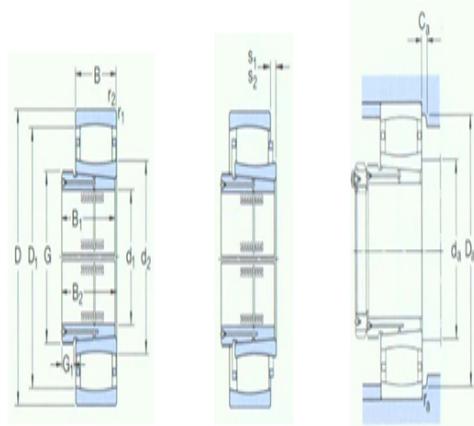

d _a the max:	910
Da the min:	1050
Da the max:	1122
Ca ³⁾ the min:	22.3
r _a the max:	6

Calculation coefficient

k ₁ :	-
k ₂ :	0.111