



Model: AOHX30/710

Basic size of
 mm

d ₁ :	670
D :	1030
B :	236

The basic rated load is
 kN

trends C :	8800
static state Co :	17300
Fatigue load limit Pu :	1060

Rated rotation speed is
 r/min

Refer to the speed :	450
limit speed :	630
Mass bearing + return sleeve :	780

model


bearing :	*C30/710K M
withdrawal sleeve :	AOHX30/710

Dimensions are
 mm

d ₁ :	670
d ₂ ~ :	807
D1 ~ :	945
B ₁ :	286
B ₂ ¹⁾ ~ :	302
G :	Tr750×7
G ₁ :	50
r _{1,2} the min :	7.5
s ₁ ²⁾ ~ :	47.3

Shoulder gear and chamfer size
 mm

d _a the min :	738
--------------------------	-----

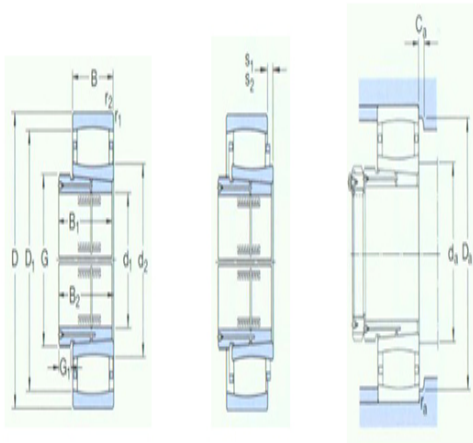

d_a the max:	850
Da the min:	910
Da the max:	1002
Ca ³) the min:	3.2
r_a the max:	6

Calculation coefficient

k_1 :	0.119
k_2 :	0.104