



Model: AOH30/750

Basic size of
mm

d ₁ :	710
D:	1090
B:	250

The basic rated load is
kN

trends C:	9000
static state Co:	18000
Fatigue load limit Pu:	1100

Rated rotation speed is
r/min

Refer to the speed:	380
limit speed:	530
Mass bearing + return sleeve:	920

model


bearing:	*C30/750KMB 1)
withdrawal sleeve:	AOH30/750

Dimensions are
mm

d ₁ :	710
d ₂ ~ :	858
D1 ~ :	993
B ₁ :	300
B ₂ ¹⁾ ~ :	316
G:	Tr800×7
G ₁ :	50
r _{1,2} the min:	7.5
s ₁ ²⁾ ~ :	25

Shoulder gear and chamfer size
mm

d _a the min:	778
-------------------------	-----

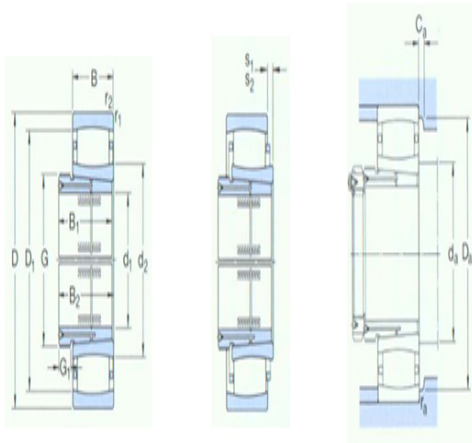

d_a the max:	855
Da the min:	995
Da the max:	1062
Ca ³) the min:	21.8
r_a the max:	6

Calculation coefficient

k_1 :	-
k_2 :	0.112