



Model: AOH30/800

Basic size of
mm

d ₁ :	750
D :	1150
B :	258

The basic rated load is
kN

trends C :	9150
static state Co :	18600
Fatigue load limit Pu :	1120

Rated rotation speed is
r/min

Refer to the speed :	360
limit speed :	480
Mass bearing + return sleeve :	1060

model


bearing :	*C30/800KMB 1)
withdrawal sleeve :	AOH30/800

Dimensions are
mm

d ₁ :	750
d ₂ ~ :	913
D1 ~ :	1047
B ₁ :	308
B ₂ ¹⁾ ~ :	326
G :	Tr850×7
G ₁ :	50
r _{1,2} the min :	7.5
s ₁ ²⁾ ~ :	25

Shoulder gear and chamfer size
mm

d _a the min :	828
--------------------------	-----

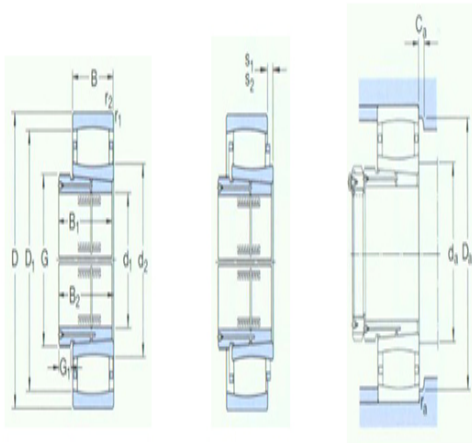

d_a the max:	910
Da the min:	1050
Da the max:	1122
Ca ³) the min:	22.3
r_a the max:	6

Calculation coefficient

k_1 :	-
k_2 :	0.111