



Model: 51338M

Basic size of
 mm


| | |
|----|-----|
| d: | 190 |
| D: | 320 |
| H: | 105 |

The basic rated load is
 kN

| | |
|------------------------------|------|
| trends C: | 592 |
| static state Co: | 2400 |
| Fatigue load limit, Pu: | 56 |
| Minimum load coefficient, A: | 30 |

Rated rotation speed is
 r/min

| | |
|---------------------|------------|
| Refer to the speed: | 700 |
| limit speed: | 950 |
| quality kg: | 36.5 |
| model: | 51338 M |

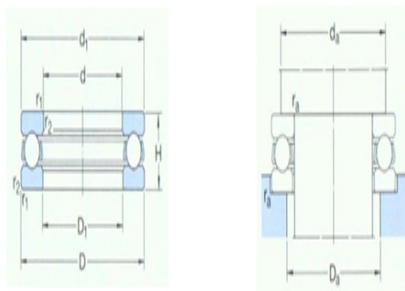

Dimensions are
 mm

| | |
|---------------|-----|
| d: | 190 |
| d1 ~ : | 315 |
| D1 ~ : | 195 |
| r1,2 the min: | 4 |

Shoulder gear and chamfer size
 mm

| | |
|-------------|-----|
| da the min: | 267 |
| Da the max: | 243 |
| ra the max: | 3 |