



**Model: 51184F**

Basic size of  
mm


d:	420
D:	500
H:	65

The basic rated load is  
kN

trends C:	410
static state Co:	2400
Fatigue load limit, Pu:	41.5
Minimum load coefficient, A:	30

Rated rotation speed is  
r/min

Refer to the speed:	700
limit speed:	1000
quality kg:	25.5
model:	51184 F

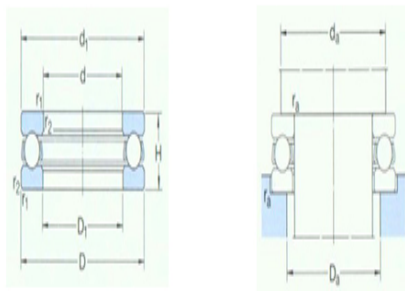

Dimensions are  
mm

d:	420
d1 ~ :	496
D1 ~ :	424
r1,2 the min:	2

Shoulder gear and chamfer size  
mm

da the min:	468
Da the max:	452
ra the max:	2