



Model: 52234M

Basic size of
 mm


| | |
|----|-----|
| d: | 150 |
| D: | 240 |
| H: | 97 |

The basic rated load is
 kN

| | |
|------------------------------|------|
| trends C: | 286 |
| static state Co: | 1020 |
| Fatigue load limit, Pu: | 26 |
| Minimum load coefficient, A: | 5.4 |

Rated rotation speed is
 r/min

| | |
|---------------------|------------|
| Refer to the speed: | 1100 |
| limit speed: | 1600 |
| quality kg: | 15 |
| model: | 52234 M |

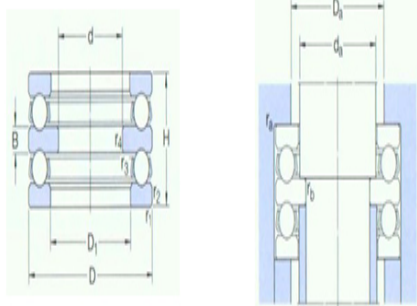

Dimensions are
 mm

| | |
|---------------------------|-----|
| d: | 150 |
| d ₁ ~ : | 173 |
| B: | 21 |
| r _{1,2} the min: | 1.5 |
| r _{3,4} the min: | 1.1 |

Shoulder gear and chamfer size
 mm

| | |
|-------------------------|-----|
| d _a : | 170 |
| Da the max: | 198 |
| r _a the max: | 1.5 |
| r _b the max: | 1 |