



Model: 29412E

Basic size of
 mm



d:	60
D:	130
H:	42

The basic rated load is
 kN

trends C:	390
static state Co:	915
Fatigue load limit, Pu:	114
Minimum load coefficient, A:	0.08

Rated rotation speed is
 r/min

Refer to the speed:	2800
limit speed:	5000
quality kg:	2.6
model:	*29412 E

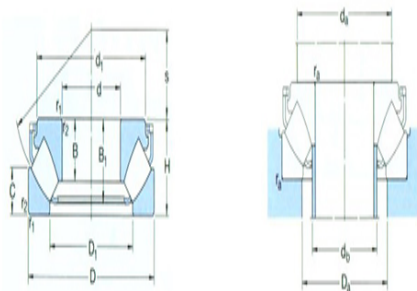

Dimensions are
 mm

d:	60
d ₁ ~ :	112.2
D1 ~ :	85.5
B:	27
B ₁ :	36.7
C:	21
r _{1,2} the min:	1.5
s:	38

Shoulder gear and chamfer size
 mm

d _a the min:	90
d _{b1} the max:	67
d _{b2} the max:	67
H _a the min:	-
Da the max:	107

r_a the max:

1.5