



Model: 29413E

Basic size of
 mm


d:	65
D:	140
H:	45

The basic rated load is
 kN

trends C:	455
static state Co:	1080
Fatigue load limit, Pu:	137
Minimum load coefficient, A:	0.11


Rated rotation speed is
 r/min

Refer to the speed:	2600
limit speed:	4800
quality kg:	3.2
model:	*29413 E

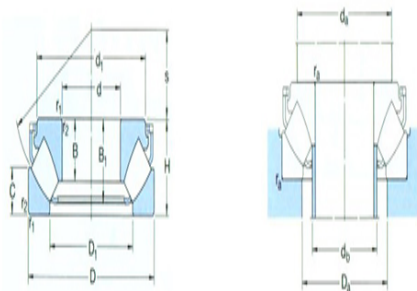

Dimensions are
 mm

d:	65
d ₁ ~ :	120.6
D1 ~ :	91.5
B:	29.5
B ₁ :	39.8
C:	22
r _{1,2} the min:	2
s:	42



Shoulder gear and chamfer size
 mm

d _a the min:	100
d _{b1} the max:	72
d _{b2} the max:	72
H _a the min:	-
Da the max:	117

