



Model: 29414E

Basic size of
 mm


d:	70
D:	150
H:	48

The basic rated load is
 kN

trends C:	520
static state Co:	1250
Fatigue load limit, Pu:	153
Minimum load coefficient, A:	0.15


Rated rotation speed is
 r/min

Refer to the speed:	2400
limit speed:	4300
quality kg:	3.9
model:	*29414 E

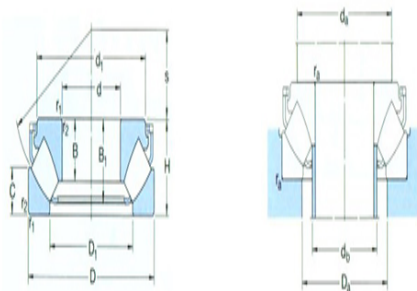

Dimensions are
 mm

d:	70
d ₁ ~ :	129.7
D1 ~ :	99
B:	31
B ₁ :	41
C:	23.8
r _{1,2} the min:	2
s:	44.8

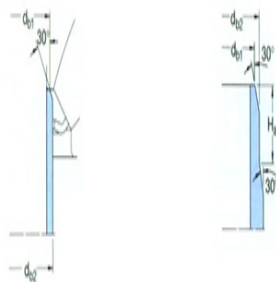

Shoulder gear and chamfer size
 mm

d _a the min:	105
d _{b1} the max:	77.5
d _{b2} the max:	77.5
H _a the min:	-
Da the max:	125

