



Model: 29416E

Basic size of
 mm



d:	80
D:	170
H:	54

The basic rated load is
 kN

trends C:	670
static state Co:	1630
Fatigue load limit, Pu:	193
Minimum load coefficient, A:	0.25

Rated rotation speed is
 r/min

Refer to the speed:	2200
limit speed:	3800
quality kg:	5.6
model:	*29416 E

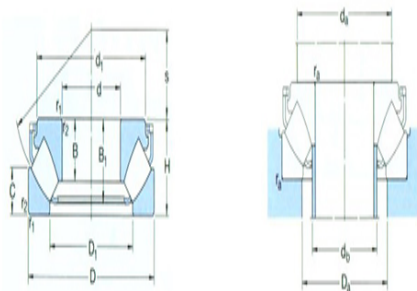

Dimensions are
 mm

d:	80
d ₁ ~ :	147.2
D ₁ ~ :	112.5
B:	35
B ₁ :	48.1
C:	26.5
r _{1,2} the min:	2.1
s:	50

Shoulder gear and chamfer size
 mm

d _a the min:	120
d _{b1} the max:	88
d _{b2} the max:	88
H _a the min:	-
Da the max:	141

