



**Model: 29417E**

Basic size of  
mm


d:	85
D:	180
H:	58

The basic rated load is  
kN

trends C:	735
static state Co:	1800
Fatigue load limit, Pu:	212
Minimum load coefficient, A:	0.31


Rated rotation speed is  
r/min

Refer to the speed:	2000
limit speed:	3600
quality kg:	6.75
model:	*29417 E

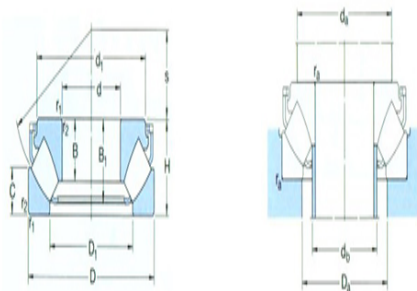

Dimensions are  
mm

d:	85
d <sub>1</sub> ~ :	155.8
D1 ~ :	121
B:	37
B <sub>1</sub> :	51.1
C:	28
r <sub>1,2</sub> the min:	2.1
s:	54

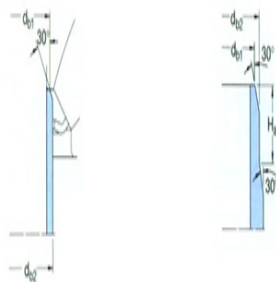

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	130
d <sub>b1</sub> the max:	94
d <sub>b2</sub> the max:	94
H <sub>a</sub> the min:	-
Da the max:	151

