



**Model: 29418E**

Basic size of  
 mm



d:	90
D:	190
H:	60

The basic rated load is  
 kN

trends C:	815
static state Co:	2000
Fatigue load limit, Pu:	232
Minimum load coefficient, A:	0.38

Rated rotation speed is  
 r/min

Refer to the speed:	1900
limit speed:	3400
quality kg:	7.75
model:	*29418 E

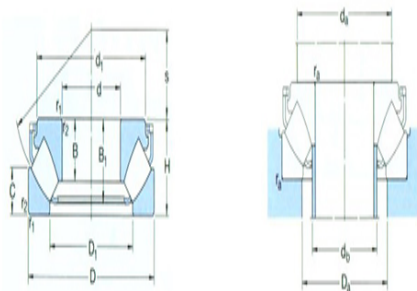

Dimensions are  
 mm

d:	90
d <sub>1</sub> ~ :	164.6
D <sub>1</sub> ~ :	127.5
B:	39
B <sub>1</sub> :	54
C:	28.5
r <sub>1,2</sub> the min:	2.1
s:	56

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	135
d <sub>b1</sub> the max:	99
d <sub>b2</sub> the max:	99
H <sub>a</sub> the min:	-
Da the max:	158

