



Model: 29320E

Basic size of
mm


d:	100
D:	170
H:	42

The basic rated load is
kN

trends C:	465
static state Co:	1290
Fatigue load limit, Pu:	156
Minimum load coefficient, A:	0.16


Rated rotation speed is
r/min

Refer to the speed:	2200
limit speed:	3600
quality kg:	3.65
model:	*29320 E

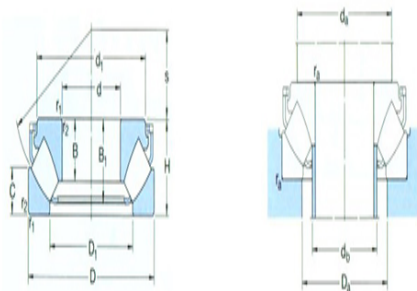

Dimensions are
mm

d:	100
d ₁ ~ :	152.3
D1 ~ :	127.5
B:	26.2
B ₁ :	36.3
C:	20.5
r _{1,2} the min:	1.5
s:	58



Shoulder gear and chamfer size
mm

d _a the min:	130
d _{b1} the max:	107
d _{b2} the max:	107
H _a the min:	-
Da the max:	147

r_a the max:

1.5