



Model: 29322E

Basic size of
 mm



d:	110
D:	190
H:	48

The basic rated load is
 kN

trends C:	610
static state Co:	1730
Fatigue load limit, Pu:	204
Minimum load coefficient, A:	0.28

Rated rotation speed is
 r/min

Refer to the speed:	1900
limit speed:	3200
quality kg:	5.3
model:	*29322 E

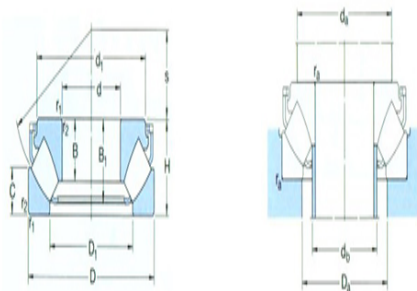

Dimensions are
 mm

d:	110
d ₁ ~ :	171.1
D ₁ ~ :	140
B:	30.3
B ₁ :	41.7
C:	24.8
r _{1,2} the min:	2
s:	63.8

Shoulder gear and chamfer size
 mm

d _a the min:	145
d _{b1} the max:	117
d _{b2} the max:	117
H _a the min:	-
D _a the max:	164

