



**Model: 29422E**

Basic size of  
 mm



d:	110
D:	230
H:	73

The basic rated load is  
 kN

trends C:	1180
static state Co:	3000
Fatigue load limit, Pu:	325
Minimum load coefficient, A:	0.86

Rated rotation speed is  
 r/min

Refer to the speed:	1600
limit speed:	2800
quality kg:	13.5
model:	*29422 E

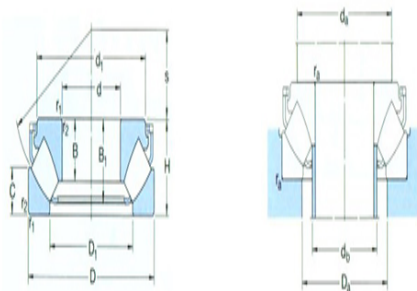

Dimensions are  
 mm

d:	110
d <sub>1</sub> ~ :	199.4
D <sub>1</sub> ~ :	155.5
B:	47
B <sub>1</sub> :	64.7
C:	34.7
r <sub>1,2</sub> the min:	3
s:	69

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	165
d <sub>b1</sub> the max:	120.5
d <sub>b2</sub> the max:	129
H <sub>a</sub> the min:	-
Da the max:	193

$r_a$  the max:

2.5