



### Model: 29424E

Basic size of  
mm



d:	120
D:	250
H:	78

The basic rated load is  
kN

trends C:	1370
static state Co:	3450
Fatigue load limit, Pu:	375
Minimum load coefficient, A:	1.1

Rated rotation speed is  
r/min

Refer to the speed:	1500
limit speed:	2600
quality kg:	17.5
model:	*29424 E

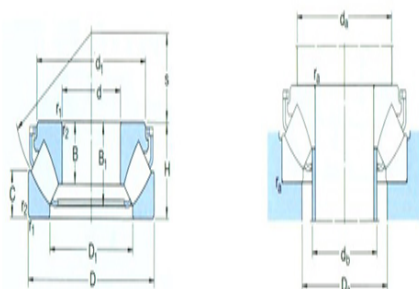

Dimensions are  
mm

d:	120
d <sub>1</sub> ~ :	216.8
D <sub>1</sub> ~ :	171
B:	50.5
B <sub>1</sub> :	70.3
C:	36.5
r <sub>1,2</sub> the min:	4
s:	74

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	180
d <sub>b1</sub> the max:	132
d <sub>b2</sub> the max:	142
H <sub>a</sub> the min:	-
Da the max:	209

