



**Model: 29326E**

Basic size of  
 mm


d:	130
D:	225
H:	58

The basic rated load is  
 kN

trends C:	865
static state Co:	2500
Fatigue load limit, Pu:	280
Minimum load coefficient, A:	0.59


Rated rotation speed is  
 r/min

Refer to the speed:	1600
limit speed:	2600
quality kg:	9
model:	*29326 E

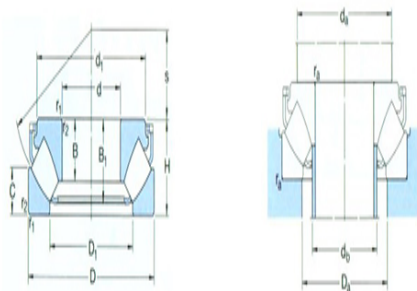

Dimensions are  
 mm

d:	130
d <sub>1</sub> ~ :	203.4
D1 ~ :	165.5
B:	36.7
B <sub>1</sub> :	50.6
C:	30.1
r <sub>1,2</sub> the min:	2.1
s:	75.6



Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	175
d <sub>b1</sub> the max:	138
d <sub>b2</sub> the max:	143
H <sub>a</sub> the min:	-
Da the max:	194

