



**Model: 29328E**

Basic size of  
 mm


d:	140
D:	240
H:	60

The basic rated load is  
 kN

trends C:	980
static state Co:	2850
Fatigue load limit, Pu:	315
Minimum load coefficient, A:	0.77


Rated rotation speed is  
 r/min

Refer to the speed:	1500
limit speed:	2600
quality kg:	10.5
model:	*29328 E

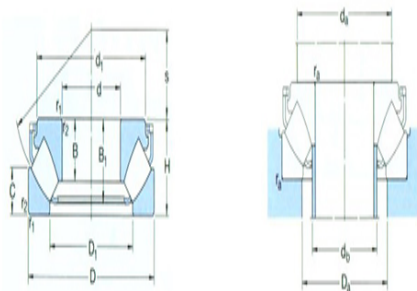

Dimensions are  
 mm

d:	140
d <sub>1</sub> ~ :	216.1
D <sub>1</sub> ~ :	177
B:	38.5
B <sub>1</sub> :	54
C:	30
r <sub>1,2</sub> the min:	2.1
s:	82

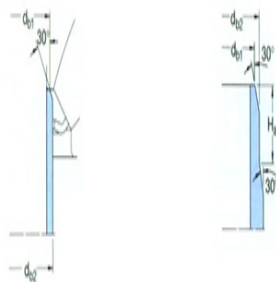

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	185
d <sub>b1</sub> the max:	148
d <sub>b2</sub> the max:	154
H <sub>a</sub> the min:	-
D <sub>a</sub> the max:	208

