



Model: 29230E

Basic size of
 mm

d:	150
D:	215
H:	39

The basic rated load is
 kN

trends C:	408
static state Co:	1600
Fatigue load limit, Pu:	180
Minimum load coefficient, A:	0.24

Rated rotation speed is
 r/min



Refer to the speed:	1800
limit speed:	2800
quality kg:	4.3
model:	29230 E

Dimensions are
 mm

d:	150
d ₁ ~ :	200.4
D1 ~ :	176
B:	24
B ₁ :	34.3
C:	20.5
r _{1,2} the min:	1.5
s:	82

Shoulder gear and chamfer size
 mm

d _a the min:	180
d _{b1} the max:	154
d _{b2} the max:	154
H _a the min:	14
Da the max:	193

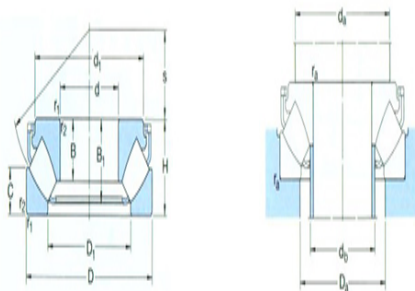

r_a the max:

1.5