



**Model: 29330E**

Basic size of  
mm



d:	150
D:	250
H:	60

The basic rated load is  
kN

trends C:	1000
static state Co:	2850
Fatigue load limit, Pu:	315
Minimum load coefficient, A:	0.77

Rated rotation speed is  
r/min

Refer to the speed:	1500
limit speed:	2400
quality kg:	11
model:	*29330 E

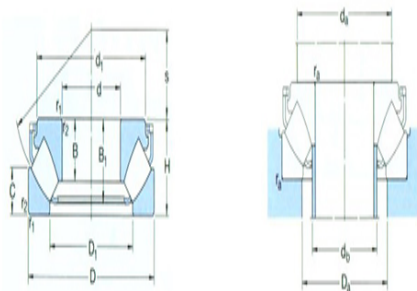

Dimensions are  
mm

d:	150
d <sub>1</sub> ~ :	223.9
D <sub>1</sub> ~ :	190
B:	38
B <sub>1</sub> :	54.9
C:	28
r <sub>1,2</sub> the min:	2.1
s:	87

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	195
d <sub>b1</sub> the max:	158
d <sub>b2</sub> the max:	163
H <sub>a</sub> the min:	-
Da the max:	219

