



Model: 29430E

Basic size of
 mm



d:	150
D:	300
H:	90

The basic rated load is
 kN

trends C:	1860
static state Co:	5100
Fatigue load limit, Pu:	520
Minimum load coefficient, A:	2.5

Rated rotation speed is
 r/min

Refer to the speed:	1200
limit speed:	2200
quality kg:	28
model:	*29430 E

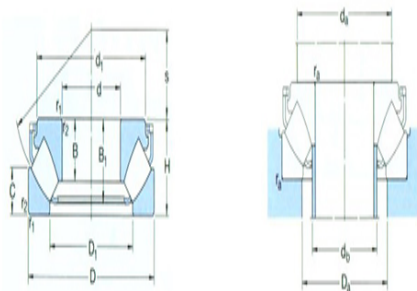

Dimensions are
 mm

d:	150
d ₁ ~ :	262.9
D ₁ ~ :	207.5
B:	58
B ₁ :	80.8
C:	43.4
r _{1,2} the min:	4
s:	92

Shoulder gear and chamfer size
 mm

d _a the min:	220
d _{b1} the max:	163
d _{b2} the max:	175
H _a the min:	-
Da the max:	253

