



**Model: 29332E**

Basic size of  
 mm



d:	160
D:	270
H:	67

The basic rated load is  
 kN

trends C:	1180
static state Co:	3450
Fatigue load limit, Pu:	375
Minimum load coefficient, A:	1.1

Rated rotation speed is  
 r/min

Refer to the speed:	1300
limit speed:	2200
quality kg:	14.5
model:	*29332 E

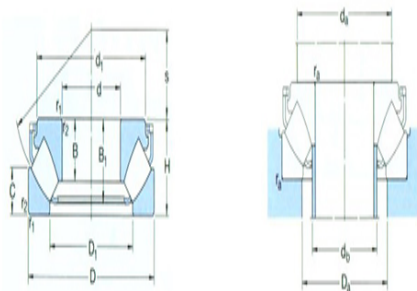

Dimensions are  
 mm

d:	160
d <sub>1</sub> ~ :	243.5
D <sub>1</sub> ~ :	203
B:	42
B <sub>1</sub> :	60
C:	33
r <sub>1,2</sub> the min:	3
s:	92

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	210
d <sub>b1</sub> the max:	169
d <sub>b2</sub> the max:	176
H <sub>a</sub> the min:	-
Da the max:	235

$r_a$  the max:

2.5