



**Model: 29334E**

Basic size of  
 mm


d:	170
D:	280
H:	67

The basic rated load is  
 kN

trends C:	1200
static state Co:	3550
Fatigue load limit, Pu:	365
Minimum load coefficient, A:	1.2


Rated rotation speed is  
 r/min

Refer to the speed:	1300
limit speed:	2200
quality kg:	15
model:	*29334 E

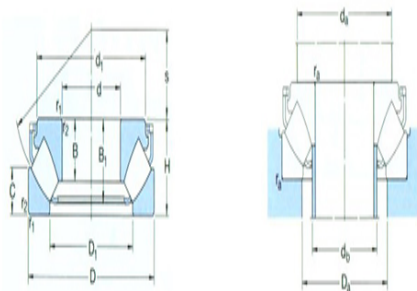

Dimensions are  
 mm

d:	170
d <sub>1</sub> ~ :	251.2
D1 ~ :	215
B:	42.2
B <sub>1</sub> :	61
C:	30.5
r <sub>1,2</sub> the min:	3
s:	96



Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	220
d <sub>b1</sub> the max:	178
d <sub>b2</sub> the max:	188
H <sub>a</sub> the min:	-
Da the max:	245

$r_a$  the max:

2.5