



Model: 29236E

Basic size of
mm


d:	180
D:	250
H:	42

The basic rated load is
kN

trends C:	495
static state Co:	2040
Fatigue load limit, Pu:	212
Minimum load coefficient, A:	0.4

Rated rotation speed is
r/min


Refer to the speed:	1600
limit speed:	2600
quality kg:	5.8
model:	29236 E

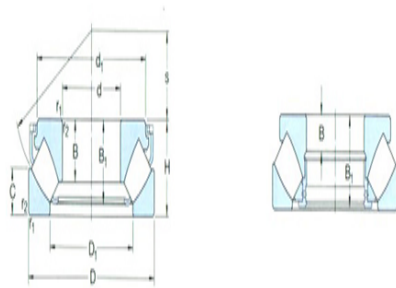

6.8.8

Dimensions are
mm

d:	180
d ₁ ~ :	234.4
D1 ~ :	208
B:	26
B ₁ :	36.9
C:	22
r _{1,2} the min:	1.5
s:	97

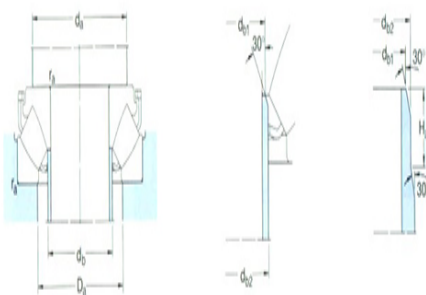

Shoulder gear and chamfer size
mm

d _a the min:	210
d _{b1} the max:	187
d _{b2} the max:	187
H _a the min:	14
Da the max:	226

r_a the max:

1.5