



Model: 29438E

Basic size of
mm


d:	190
D:	380
H:	115

The basic rated load is
kN


trends C:	2850
static state Co:	8000
Fatigue load limit, Pu:	765
Minimum load coefficient, A:	6.1

Rated rotation speed is
r/min

Refer to the speed:	950
limit speed:	1700
quality kg:	60.5
model:	*29438 E

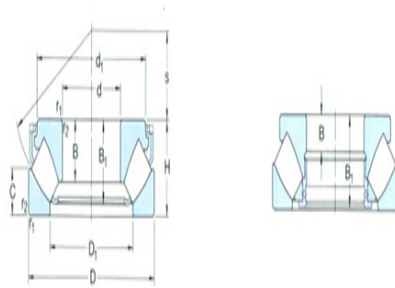

6.8.8.11

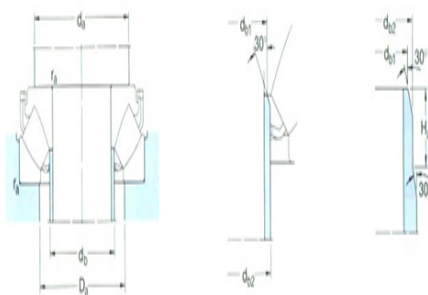

Dimensions are
mm

d:	190
d ₁ ~ :	332.9
D1 ~ :	264.5
B:	73
B ₁ :	101
C:	55.5
r _{1,2} the min:	5
s:	117

Shoulder gear and chamfer size
mm

d _a the min:	280
d _{b1} the max:	207
d _{b2} the max:	223
H _a the min:	-
Da the max:	321

