



Model: 29240E

Basic size of
 mm


d:	200
D:	280
H:	48

The basic rated load is
 kN


trends C:	656
static state Co:	2650
Fatigue load limit, Pu:	285
Minimum load coefficient, A:	0.67

Rated rotation speed is
 r/min

Refer to the speed:	1400
limit speed:	2200
quality kg:	9.3
model:	29240 E

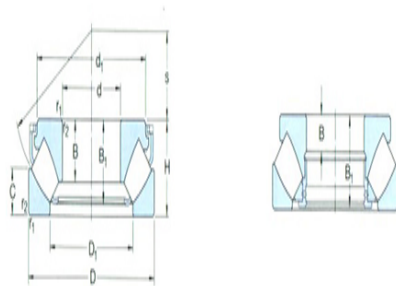

6.8.8

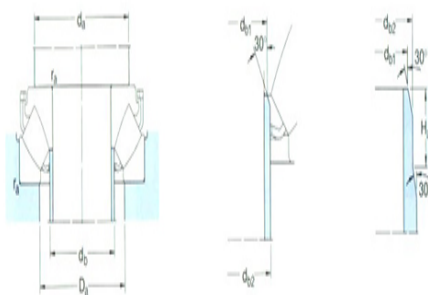

Dimensions are
 mm

d:	200
d ₁ ~ :	260.5
D ₁ ~ :	232.5
B:	30
B ₁ :	43.4
C:	24
r _{1,2} the min:	2
s:	108

Shoulder gear and chamfer size
 mm

d _a the min:	235
d _{b1} the max:	206
d _{b2} the max:	207
H _a the min:	17
Da the max:	253

