



Model: 29440E

Basic size of
mm


d:	200
D:	400
H:	122

The basic rated load is
kN


trends C:	3200
static state Co:	9000
Fatigue load limit, Pu:	850
Minimum load coefficient, A:	7.7

Rated rotation speed is
r/min

Refer to the speed:	850
limit speed:	1600
quality kg:	72
model:	*29440 E

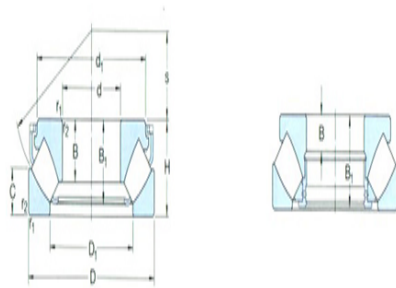

6.8.8.11

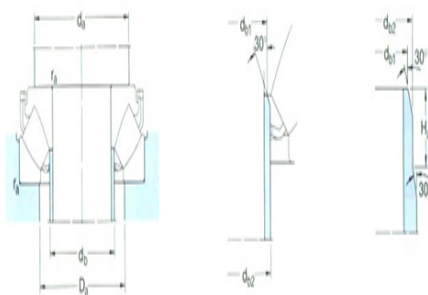

Dimensions are
mm

d:	200
d ₁ ~ :	350.7
D ₁ ~ :	277.5
B:	77
B ₁ :	107.1
C:	59.4
r _{1,2} the min:	5
s:	122

Shoulder gear and chamfer size
mm

d _a the min:	295
d _{b1} the max:	217.5
d _{b2} the max:	234
H _a the min:	-
D _a the max:	337

