



**Model: 29244E**

Basic size of  
 mm


d:	220
D:	300
H:	48

The basic rated load is  
 kN

trends C:	690
static state Co:	3000
Fatigue load limit, Pu:	310
Minimum load coefficient, A:	0.86

Rated rotation speed is  
 r/min


Refer to the speed:	1300
limit speed:	2200
quality kg:	10
model:	29244 E

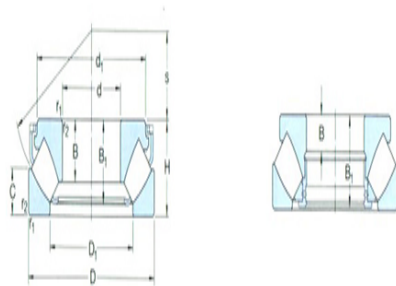

6.8.8

Dimensions are  
 mm

d:	220
d <sub>1</sub> ~ :	280.5
D1 ~ :	251.5
B:	30
B <sub>1</sub> :	43.4
C:	24.5
r <sub>1,2</sub> the min:	2
s:	117

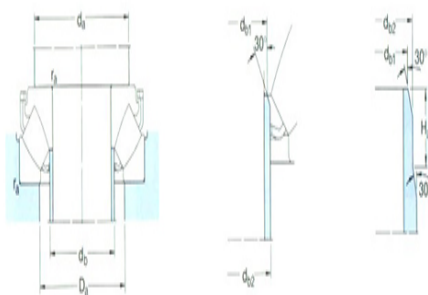

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	255
d <sub>b1</sub> the max:	224.5
d <sub>b2</sub> the max:	227
H <sub>a</sub> the min:	17
D <sub>a</sub> the max:	271

