



Model: 29344E

Basic size of
mm


d:	220
D:	360
H:	85

The basic rated load is
kN


trends C:	2000
static state Co:	6300
Fatigue load limit, Pu:	610
Minimum load coefficient, A:	3.8

Rated rotation speed is
r/min

Refer to the speed:	1000
limit speed:	1700
quality kg:	33.5
model:	*29344 E

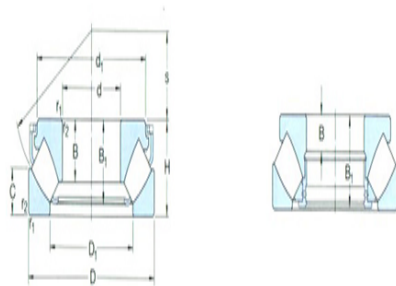

6.8.8

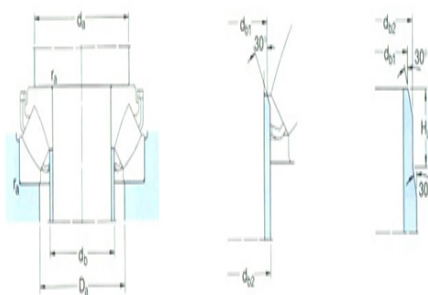

Dimensions are
mm

d:	220
d ₁ ~ :	326.3
D ₁ ~ :	273.5
B:	55
B ₁ :	77.7
C:	41
r _{1,2} the min:	4
s:	125

Shoulder gear and chamfer size
mm

d _a the min:	285
d _{b1} the max:	229
d _{b2} the max:	240
H _a the min:	-
Da the max:	316

