



## Model: 29248

Basic size of  
mm


d:	240
D:	340
H:	60

The basic rated load is  
kN

trends C:	799
static state Co:	3450
Fatigue load limit, Pu:	335
Minimum load coefficient, A:	1.1

Rated rotation speed is  
r/min


Refer to the speed:	1100
limit speed:	1800
quality kg:	16.5
model:	2924 8

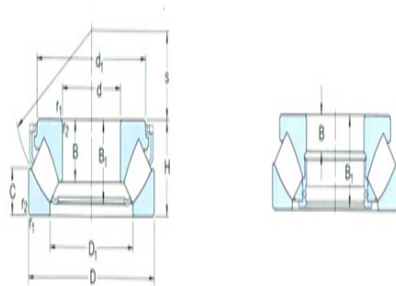

6.8.8

Dimensions are  
mm

d:	240
d <sub>1</sub> ~ :	330
D1 ~ :	283
B:	19
B <sub>1</sub> :	57
C:	30
r <sub>1,2</sub> the min:	2.1
s:	130

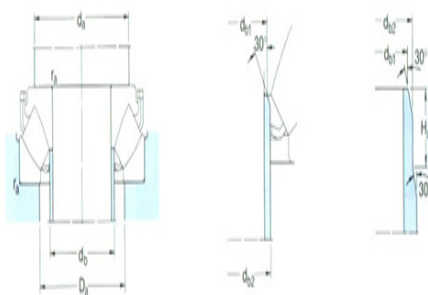

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	290
d <sub>b1</sub> the max:	-
d <sub>b2</sub> the max:	-
H <sub>a</sub> the min:	-
Da the max:	308

