



## Model: 29448E

Basic size of  
mm


d:	240
D:	440
H:	122

The basic rated load is  
kN


trends C:	3400
static state Co:	10200
Fatigue load limit, Pu:	930
Minimum load coefficient, A:	9.9

Rated rotation speed is  
r/min

Refer to the speed:	850
limit speed:	1500
quality kg:	80
model:	*29448 E

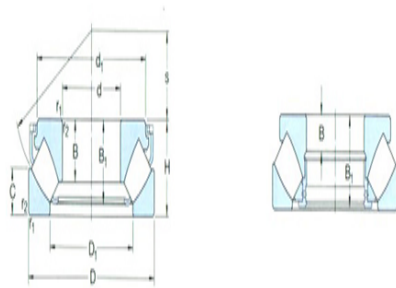

6.8.8.1

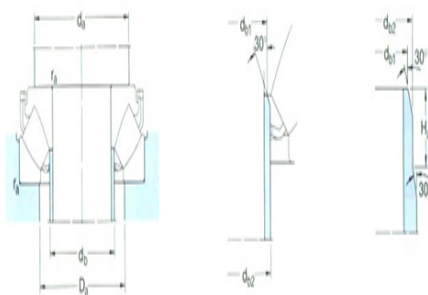

Dimensions are  
mm

d:	240
d <sub>1</sub> ~ :	391.6
D <sub>1</sub> ~ :	322
B:	76
B <sub>1</sub> :	107.1
C:	59
r <sub>1,2</sub> the min:	6
s:	142

Shoulder gear and chamfer size  
mm

d <sub>a</sub> the min:	335
d <sub>b1</sub> the max:	258
d <sub>b2</sub> the max:	276
H <sub>a</sub> the min:	-
Da the max:	378

