



Model: 29352E

Basic size of
 mm


d:	260
D:	420
H:	95

The basic rated load is
 kN


trends C:	2550
static state Co:	8300
Fatigue load limit, Pu:	780
Minimum load coefficient, A:	6.5

Rated rotation speed is
 r/min

Refer to the speed:	850
limit speed:	1400
quality kg:	49
model:	*29352 E

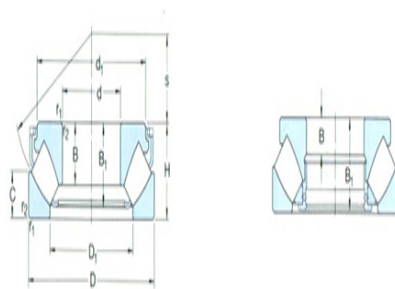

6.8.8.1

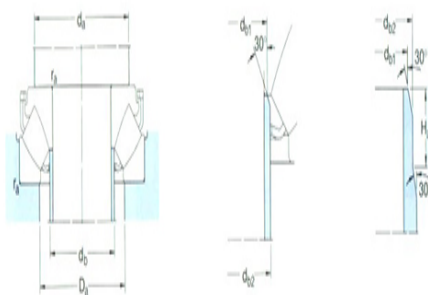

Dimensions are
 mm

d:	260
d ₁ ~ :	382.2
D ₁ ~ :	324
B:	61
B ₁ :	86.6
C:	46
r _{1,2} the min:	5
s:	148

Shoulder gear and chamfer size
 mm

d _a the min:	335
d _{b1} the max:	273
d _{b2} the max:	286
H _a the min:	-
Da the max:	370

