



**Model: 29256**

Basic size of  
 mm


d:	280
D:	380
H:	60

The basic rated load is  
 kN


trends C:	863
static state Co:	4000
Fatigue load limit, Pu:	375
Minimum load coefficient, A:	1.5

Rated rotation speed is  
 r/min

Refer to the speed:	1000
limit speed:	1700
quality kg:	19.5
model:	2925 6

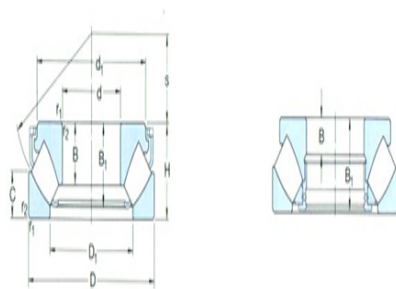

6.8.8.11

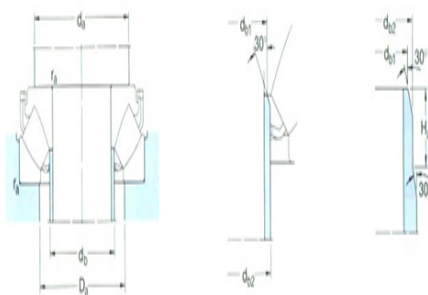

Dimensions are  
 mm

d:	280
d <sub>1</sub> ~ :	370
D <sub>1</sub> ~ :	323
B:	19
B <sub>1</sub> :	57
C:	30.5
r <sub>1,2</sub> the min:	2.1
s:	150

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	325
d <sub>b1</sub> the max:	-
d <sub>b2</sub> the max:	-
H <sub>a</sub> the min:	-
Da the max:	347

