



**Model: 29356E**

Basic size of  
 mm


d:	280
D:	440
H:	95

The basic rated load is  
 kN


trends C:	2550
static state Co:	8650
Fatigue load limit, Pu:	800
Minimum load coefficient, A:	7.1

Rated rotation speed is  
 r/min

Refer to the speed:	850
limit speed:	1400
quality kg:	53
model:	*29356 E

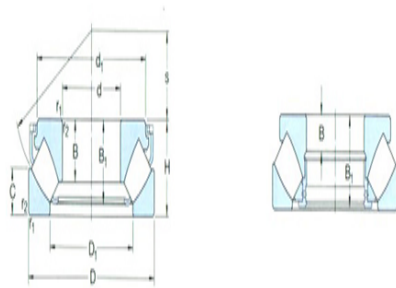

6.8.8.1

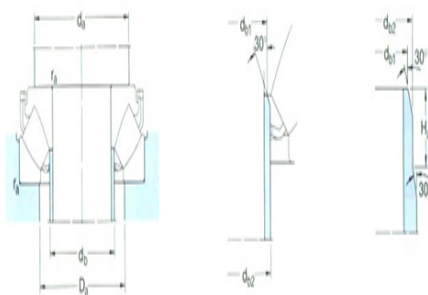

Dimensions are  
 mm

d:	280
d <sub>1</sub> ~ :	401
D <sub>1</sub> ~ :	343
B:	62
B <sub>1</sub> :	86.7
C:	45.5
r <sub>1,2</sub> the min:	5
s:	158

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	355
d <sub>b1</sub> the max:	293
d <sub>b2</sub> the max:	305
H <sub>a</sub> the min:	-
Da the max:	390

