



Model: 29456E

Basic size of
 mm


d:	280
D:	520
H:	145

The basic rated load is
 kN


trends C:	4900
static state Co:	15300
Fatigue load limit, Pu:	1320
Minimum load coefficient, A:	22

Rated rotation speed is
 r/min

Refer to the speed:	670
limit speed:	1200
quality kg:	135
model:	*29456 E

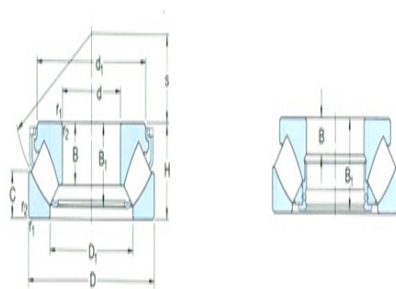

6.8.8.11

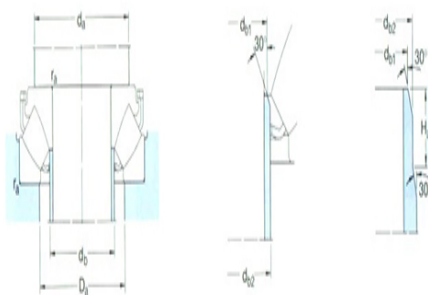

Dimensions are
 mm

d:	280
d ₁ ~ :	464.3
D ₁ ~ :	372
B:	95
B ₁ :	129.9
C:	70
r _{1,2} the min:	6
s:	166

Shoulder gear and chamfer size
 mm

d _a the min:	395
d _{b1} the max:	300
d _{b2} the max:	320
H _a the min:	-
Da the max:	446

