



**Model: 29360E**

Basic size of  
 mm


d:	300
D:	480
H:	109

The basic rated load is  
 kN


trends C:	3100
static state Co:	10600
Fatigue load limit, Pu:	930
Minimum load coefficient, A:	11

Rated rotation speed is  
 r/min

Refer to the speed:	750
limit speed:	1200
quality kg:	75
model:	*29360 E

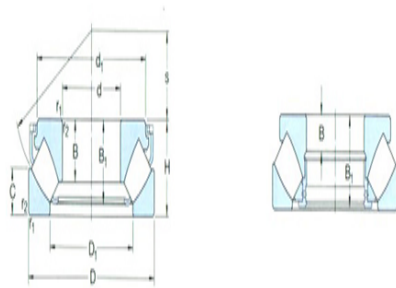

6.8.8.11

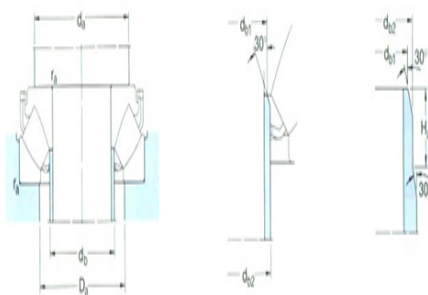

Dimensions are  
 mm

d:	300
d <sub>1</sub> ~ :	434.1
D <sub>1</sub> ~ :	372
B:	70
B <sub>1</sub> :	98.9
C:	51
r <sub>1,2</sub> the min:	5
s:	168

Shoulder gear and chamfer size  
 mm

d <sub>a</sub> the min:	385
d <sub>b1</sub> the max:	313
d <sub>b2</sub> the max:	329
H <sub>a</sub> the min:	-
Da the max:	423

